

Related Information

- General terms and conditions..... F-3
- Selection guide P.1401
- Typical counter applications P.1402
- Options P.1423~



Features

- **Bright and easy-to-read display (for 4-digit and 6-digit display types)**
2-color backlight LCD display
- **Easy to use, simple operation, simple settings**
 - Operation modes can be set using DIP switches on the side panel
 - Set values can be set using key switches on the front panel
- **Pre-scaling function provided**
- **Built-in power supply for highcapacitance sensor (for AC power supply type)**
- **Two-wire system DC sensor can be connected**
- **Screw terminal type (M3.5) and Pin type are both standard models.**
- **Replaceable panel cover**
Panel design can be changed from standard (ash gray) to black (sold separately)

IP66 Mode selectable DIN=48

Electronic counters with pre-scale function connectable to an AC two-wire sensor

PRODUCT TYPES

Digit	Count speed	Operation mode	Output	Operating voltage	Power for sensor	Terminal type	Model No.
4	30 Hz/ 5 kHz switchable	<ul style="list-style-type: none"> • Maintain output/hold count • Maintain output/over count I • Maintain output/over count II • One shot/over count • One shot/recount I • One shot/recount II • One shot/hold count (7 modes) 	Relay output	100 to 240 V AC	12 V DC 100 mA	11 pins	LC4H-PS-R4-AC240V
				12 to 24 V DC / 24 V	None	Screw terminal	LC4H-PS-R4-AC240VS
					Transistor output	12 to 24 V DC / 24 V	None
			None	Screw terminal			LC4H-S-R4-24VS
				Relay output		100 to 240 V AC	12 V DC 100 mA
			12 to 24 V DC / 24 V		None		
Transistor output	12 to 24 V DC / 24 V AC	None			11 pins	LC4H-S-R6-24V	
			Screw terminal	LC4H-S-R6-24VS			


Notes: 1) Rubber packing (ATC18002) and an mounting frame (AT8-DA4) are included.
2) 100 to 240 V AC transistor outputs (11-pin terminal, screw-tightening terminal) types are also supported.

WHAT IS THE PRESCALE FUNCTION?

The prescale function converts the count into an actual value (amount) and displays it.

Example: For a device that outputs 500 pulses when 1 m 3.281 ft has been fed:

- ① Set decimal position to the last 3rd place.
- ② Set the prescale value to 0.002 (1/500).

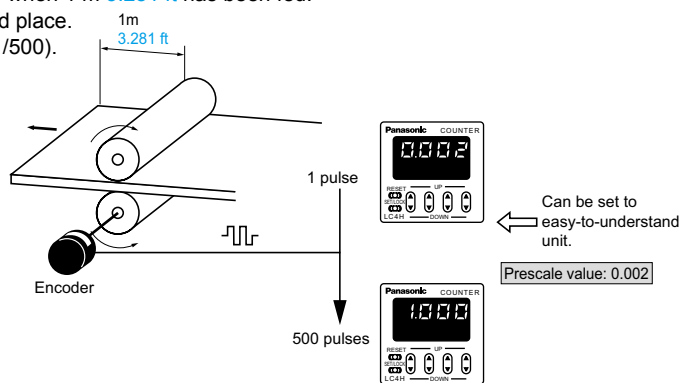

- FIBER SENSORS
- LASER SENSORS
- PHOTOELECTRIC SENSORS
- MICRO PHOTOELECTRIC SENSORS
- AREA SENSORS
- SAFETY LIGHT CURTAINS / SAFETY COMPONENTS
- PRESSURE / FLOW SENSORS
- INDUCTIVE PROXIMITY SENSORS
- PARTICULAR USE SENSORS
- SENSOR OPTIONS
- SIMPLE WIRE-SAVING UNITS
- WIRE-SAVING SYSTEMS
- MEASUREMENT SENSORS
- STATIC CONTROL DEVICES
- LASER MARKERS
- PLC
- HUMAN MACHINE INTERFACES
- ENERGY MANAGEMENT SOLUTIONS
- FA COMPONENTS
- MACHINE VISION SYSTEMS
- UV CURING SYSTEMS
- Timers
- Time Switches
- Counters
- Hour Meters
- Options
- Limit Switches
- Temperature Controllers
- Solenoids
- Fan Motors
- Selection Guide
- Applications
- LC2H series
- LC4H series