

## Machine Vision System IMAGECHECKER

PV200 SERIES



### High End Performance in a Compact Body



## COMPACT & HIGH SPEC

ULTRA HIGH SPEED VISION SYSTEM IMAGECHECKER PV200 SERIES

# COMPACT & **HIGH SPEC**

ULTRA HIGH SPEED VISION SYSTEM IMAGECHECKER PV200 SERIES







## Improved inspection reliability while reducing engineering time

Image processing with impressive accuracy and performance can now be achieved  
while requiring a surprisingly low implementation and programming time.

The new ideal machine is a color/grey combination type.

# Hardware

Color and grey images can be simultaneously captured for inspection.

In addition, the "3+1" Quad processor provides ultra-high speed parallel processing, significantly reducing the inspection time.



Features are condensed into the ultra-compact body guaranteeing outstanding usability.

## Quad processor, DSP processing & Pipeline processing


"3 + 1" Quad processor for high speed processing

Consists of a processor exclusively for image capture and transfer, a high-speed RISC-CPU, image-processing DSP, and a processor exclusively for display processing

- Pipeline processing by the Quad processor enables concurrent operation of the image capture process and inspection process.
- Ease of operation is increased, because data R (read) / W (write) (see page 10) and display layout switching operations are possible in the RUN mode.
- DSP processing: High-speed DSP is a processor dedicated for realtime image and grey pre-process filtering.
- High reliability, fan-less, standalone hardware

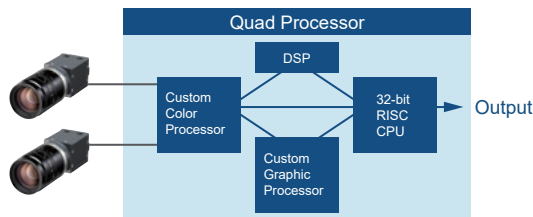


With pipeline (parallel) processing, image capturing and inspection can execute at the same time.

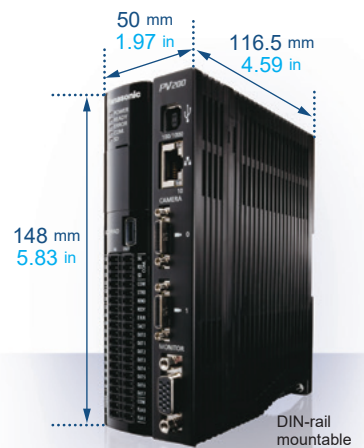

## Two cameras, including a combination of color and grey cameras, can be simultaneously connected.

High definition color and grey cameras can be simultaneously connected. Inspections with color and grey images can be conducted concurrently.

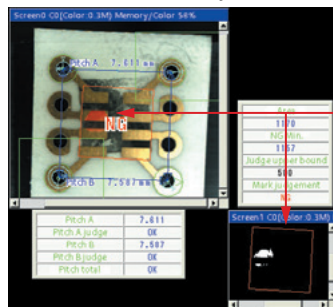

Color images clearly show red bad marks, which are difficult to detect with grey images.

## Camera selections


Seven types of cameras, including a 4M grey camera, are available with the system.

0.3M compact camera has been added to the product line-up. The body is approximately 20 mm 0.79 in more compact lengthwise compared to previous 0.3M grey cameras.




\*1: The main body firmware Ver.1.50 or later is required. Software can be downloaded from our website.  
\*2: A dedicated cable is required for connecting.  
\*3: The 4M camera cannot be used in combination with another type of camera.

## Color / Grey combination inspection system

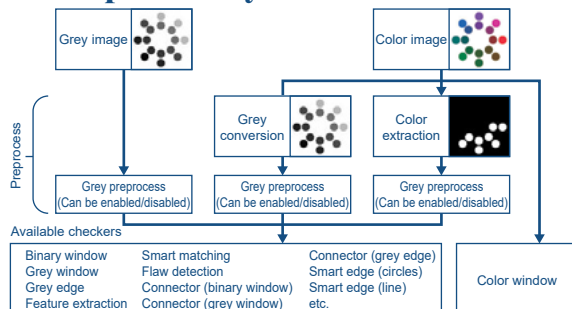


### Grey conversion

Highly flexible grey conversion is possible, because each coefficient can be freely specified for each RGB value of a color image.

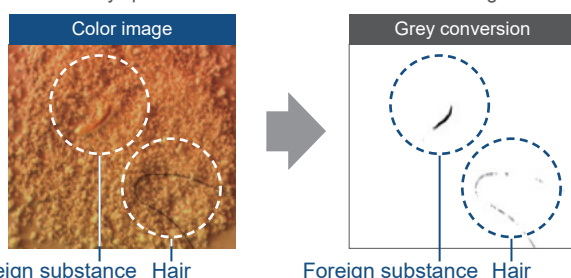


### Color window

The maximum, minimum, average, and deviation of RGB values can be obtained. Results can be used for numerical calculations and outputted externally.

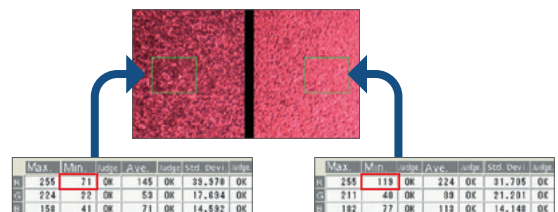

### Color extraction

Colors in different color phases can be simultaneously extracted and inspected by using one inspection checker.

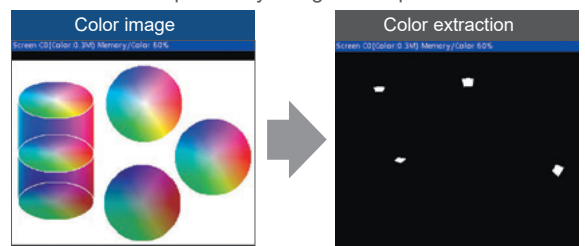

Purple and red orange is extracted.



## Branch execution/Designated execution




The inspections can be quickly changed to meet multiple product types or various conditions.

### Branch execution


Up to nine branches can be set to choose an inspection to be executed depending on the test results.

\*PV260 cannot do branch execution.

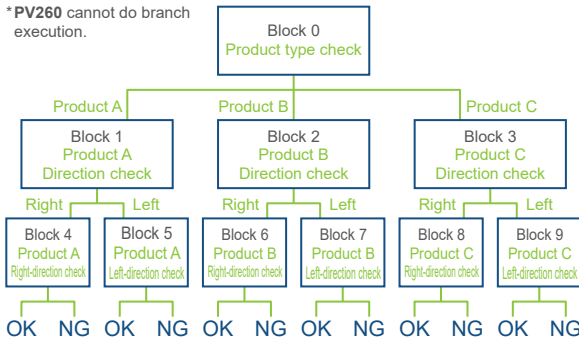

### Designated execution

After trigger signal is applied, up to ten different inspections can be executed immediately. This minimizes the time spent on switching product types.

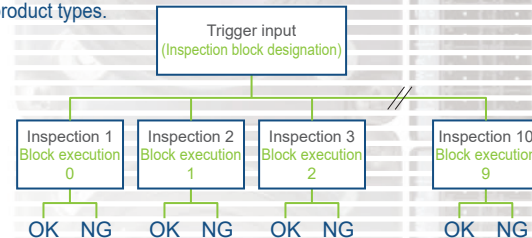

Inspection result of each block is stored until the next execution.


A dedicated application can be created by controlling the block execution timing externally.

### Applications


**Case 1** One work is moved and inspected numerous times then given a total judgment (inspection of target using split captures in order to obtain necessary resolution).

#### Total judgment result output with last block


Block 0 (Inspection of area on furthest left)



Block 1 (Inspection of next area)




Block 3 (Inspection of last area and total judgment)




**Case 2** Imaging conditions are changed, work is inspected numerous times, and total judgment is made (lighting of light source is controlled by a PLC).

#### Result of Block 0 is used to inspect at Block 1.

Block 0 (Position adjustment of work)




Block 1 (External inspection)




**Case 3** Simple alignment

#### Result of Block 0 is used to inspect at Block 1.

Block 0 (Target position registered)



Block 1 (Shift amount calculated)



## Inspections of a variety of points of a variety of product types

- Data for up to 256 types can be saved in the built-in memory alone, and 25,600 types with an SD memory card inserted.
- Maximum registrable number of checkers: 1,000 checkers / type

Checker types	Line	Binary window	Grey window	Binary edge	Grey edge
	Feature extraction	Smart matching	Contour matching	Flaw detection	Color window
	Three connectors (binary window, grey window, and grey edge)			Smart edge (circles) / (line)	

A total of 15 types

- Maximum registrable number of templates: 2,000 templates
- Maximum available number of numerical calculation formulas: 1,000 formulas / type

A variety of operators for numerical calculation are available: Four fundamental operations (+, -, x, ÷), bracket operation, trigonometric function (14 types), comparison function (6 types), mathematical function (15 types), geometric function (18 types), and statistical function (18 types)

- Execution blocks: 10 blocks / type
- Position adjustment: 1,000 checkers / type, Area adjustment: 1,000 checkers / type

# Preprocessing


## ● Grey conversion / Color extraction

- Grey conversion: Max. 16 groups/camera

The conversion coefficients are set for the color image RGB greyscale value and the image is converted to grey. Each RGB coefficient can be set freely (-1,000 to +1,000). This makes it difficult for the inspection to be affected by color changes, such as by the removal of low saturation (low coloration) or non-color parts and by target color enhancement, caused by lighting fluctuations.

- Color extraction: Max. 128 colors/type (one camera, expansion mode)

Utilizing the parameters H (Hue), S (Saturation) and V (Value), which resemble the way humans perceive differences in color, multiple colors (max. 128 colors) can be extracted simultaneously.

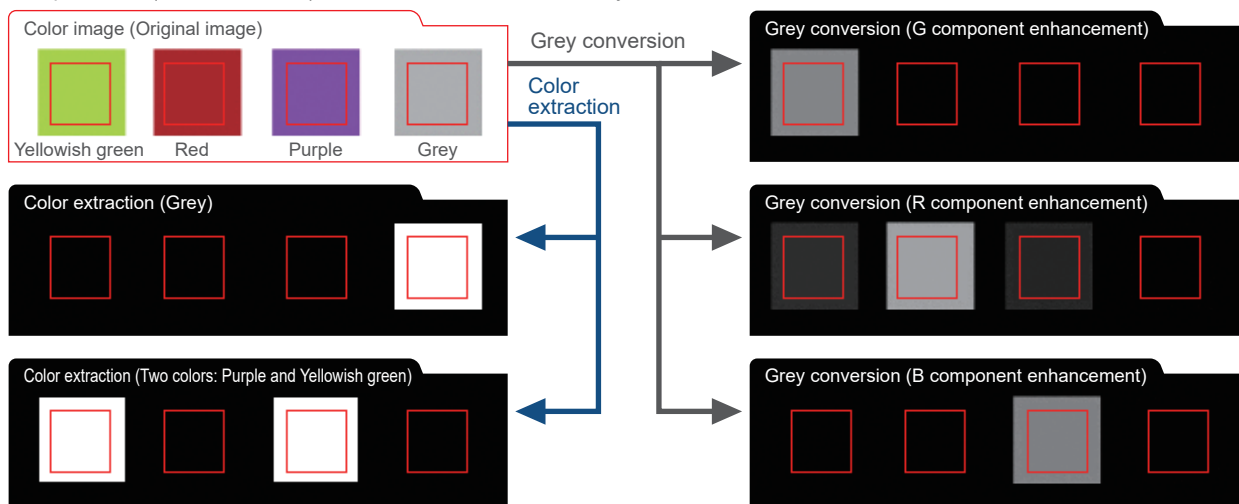

## ● Grey preprocess filters

21 types of grey preprocess filters are available. Reliable inspections are possible even under non-uniform lighting conditions or in the case of images with noise.

- Preprocess filters: 21 types
- Preprocess groups: Max. 16 groups/camera
- Preprocess steps: Max. 10 steps/group

Main purpose	Filter name
Flaw detection	<ul style="list-style-type: none"> <li>• Tophat</li> <li>• Dynamic</li> <li>• Grey difference</li> </ul>
Noise removal	<ul style="list-style-type: none"> <li>• Dilation</li> <li>• Erosion</li> <li>• Erosion → Dilation</li> <li>• Dilation → Erosion</li> </ul>
Image adjustment	<ul style="list-style-type: none"> <li>• Rotation</li> <li>• Reflect</li> </ul>

Main purpose	Filter name
Contour enhancement	<ul style="list-style-type: none"> <li>• Sobel</li> <li>• Prewitt</li> <li>• Laplacian</li> <li>• Edge extraction X</li> <li>• Edge extraction Y</li> <li>• Sharpen</li> </ul>
Blurring	<ul style="list-style-type: none"> <li>• Median</li> <li>• Smoothing</li> </ul>
Contrast enhancement	<ul style="list-style-type: none"> <li>• Auto correction</li> <li>• Grey cut</li> <li>• Area averaging</li> <li>• Correction settings</li> </ul>

Application example	Original image	Processed image
Checking container lids for adhesion of foreign substances Filter used [ Tophat ]		
Checking films / sheets for scratches / wrinkles Filter used [ Grey difference, Area averaging ]		
Detecting dirt on transparent sheets Filter used [ Dynamic ]		

Application example	Original image	Processed image
Extracting printed characters (deleting the background) Filter used [ Dynamic ]		
Checking the inside of containers for adhesion of foreign substances Filter used [ Grey difference, Tophat ]		
Checking sintered parts for breaks / cracks Filter used [ Grey difference, Tophat ]		



# Checker Functions

IMAGECHECKER  
PV200

## Smart edge (Circle)/(Line)



Complicated inspection processes can be easily performed with highly accurate measurements.


A function for accurate approximation of circles/lines

This function detects a maximum of 3,000 edge points for a line and 3,600 for a circle in one area, dramatically improving the accuracy of the dimension and position measurements.


### Operation principle

1. A Grey edge scanning area is created, and edge points in the area are searched to detect the contour of the object.
2. Virtual circles and approximate straight lines can be identified with a high degree of accuracy based on the target edge points.
3. Pass (OK) /fail (NG) evaluations are made based on the measured values (radius, diameter, and width), deviations, circularity, straightness, and the number of edges outside the area.


### Smart edge (circle) setting example

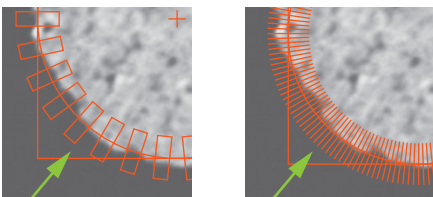

One cell can have a minimum width of one pixel (linear scanning), and a maximum of 3,600 cells can be set per 0.1°.




The center of the virtual circle, radius, diameter, circularity, and ring width can be measured.




The center and radius of the corner are measured.


### Smart edge (line) setting example

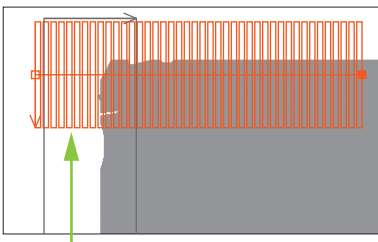

A maximum of 3,000 cells can be set.




The influence of surface imperfections is eliminated to accurately detect the target straight line by approximation.



Imperfections along a target sample can be analyzed for maximum and minimum values.

## Geometry calculation



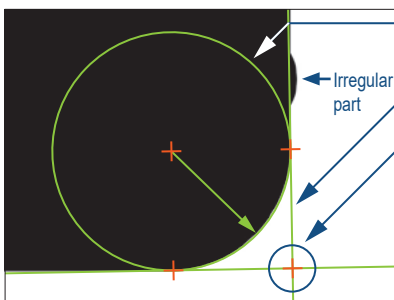


Virtual circle  
Approximate straight line  
Intersection of two lines

Distances, intersections, and median lines can be detected.

This function detects the distance between two points, the intersection of two lines, the median line of two lines, the perpendicular distance, and an approximate ellipse. In combination with Smart edge (circle) / (line), this function recognizes the object as a geometric figure, allowing the coordinates, distances, dimensions, and angles to be obtained without preparing calculation formulas.

### Applications



# Checker Functions

## Matching



By using the **PV200** series matching function, highly accurate detection is possible using two means of matching that take into account the characteristics of the target object and the process environment.

### Smart matching



#### Pattern search




Through means of a unique normalization process, stable detection can be achieved with reduced influence from grey fluctuations.



**Detects even with low-contrast images**




**Detects even with negative images**



#### Selection possible among multiple templates

A high-precision inspection is possible by searching a maximum of 64 templates in the same search area to detect a result with the highest correlation.

##### Template images

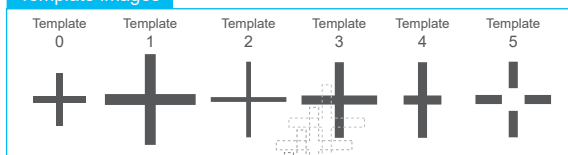



Object of search



After searching all templates, Template 3 with the highest correlation is used for detection.

#### Extraction of deviating portion using pattern difference

Based on the position information obtained by the matching function, the registered object and detected object are overlapped and compared on a pixel-by-pixel basis. Any pixels with a difference in brightness over a certain level are detected. The area value of such pixels can then be used to make pass/fail evaluations.



### Contour matching

#### Contour search




A template is created from the contour information (object) obtained from the grey change points (edge points), which means stable detection can be achieved without being influenced by the object shape or changes to the background.





**Detects even if background changes.**

Even if all of detected target object is registered, detection will be stable regardless of the state of the background.



**Detects even if target object is hidden**

Stable detection is possible even if part of the object being detected is deficient.





**Detects even if target object is overlapped**



**Detects even if the magnification changes ( $\pm 10\%$  max.)**

The same template can be used for detection even if in processes where the distance between the work and the camera changes.



**Detects even with noise on the target object**

Stable detection is possible even if the part of the object being detected changed due to a limitation in the lighting or inspection process.



### Common template



Register to smart matching



Register to contour matching


- When a common template is used, the information of all checkers that use the same template will be updated with the switch of one template. Compared to the setting of templates individually, time is saved by reducing repetitious work and operational mistakes are prevented.
- Also, since it is not necessary to register the same template more than once, space for holding templates on the **PV200** series can be saved. Images registered as common templates can be used for both smart matching and contour matching.



## Flaw detection



This function is ideal for critical appearance inspections, such as scratches, stains, chipped edges, burrs, and other flaws in objects. The inspection is carried out by comparing a target's greyscale image with neighboring parts, which helps in the detection of minor scratches, stains, and chips.

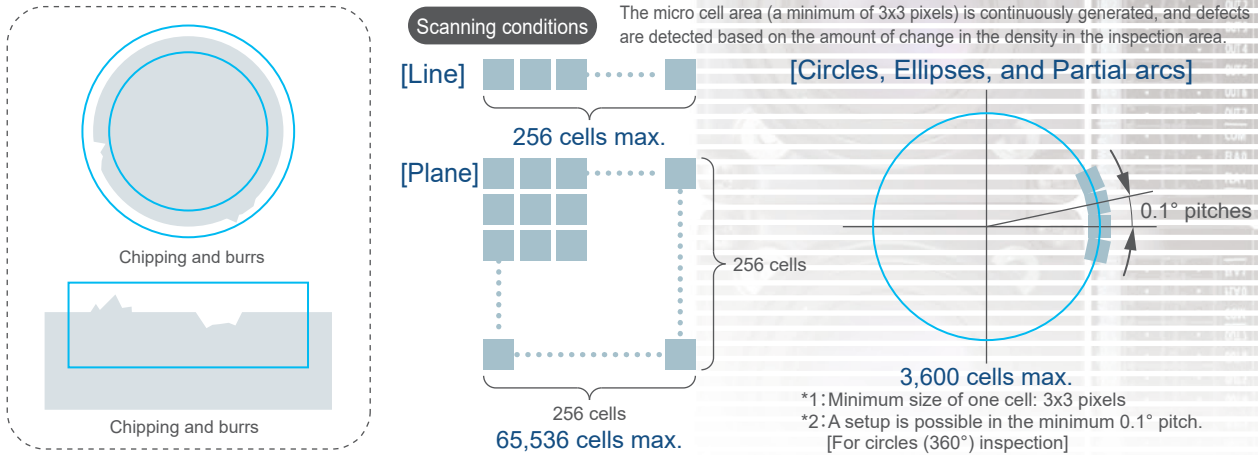


## Connector checker




Setup for connector inspection has been burdensome up to now. Now inspection can be accomplished by creating one area. This enables a great man-hour reduction.

### Inspection example




### Pin pitch inspection

This function measures the distance between the edges of each pair of adjacent pins and evaluates the results based on the preset upper and lower limits. Data of the "start point", "end point", and "number of pins" should be input.



### Pin coplanarity inspection

This function detects raised pins. In the same way as the pin pitch inspection, setting simply adjusts the position using one checker and then inputting the number of pins.



### Inside pin gap inspection



This function inspects the gap between facing ends of pins. Simply input the number of pins. The upper and lower limits of the gap can be set.

## Coordinate calibration

Setting and calculation is possible, linking the camera image with the actual dimensions.

### Link two images



Global coordinates between two cameras are generated and both results are quoted to enable direct calculation.



Calculation is possible mixing the separate detected data by two cameras.

### Dynamic calibration

Conveyance differences arising during stage and index conveyance are adjusted each time to enable stable measuring of the work dimensions.



## Our unique algorithm for ultra high speed processing

Parallel processing by Quad processor and our unique algorithm ensure outstanding ultra high speed inspections.

[Execution processing speed]		Unit: msec		
Checker functions*1	640 × 480	1,600 × 1,200	2,048 × 2,048	
Binary window	0.5	1.7	3.3	
Grayscale window	0.4	1.5	2.9	
Binary edge	2.1	11.3	23.7	
Grayscale edge	8.7	54.0	117.2	
Feature extraction	1.1	3.8	6.9	
Smart matching*2	5.0	32.3	63.5	
Contour matching*3	26.4	111.3	329.4	

\*1: The processing speed above is a reference value based on default settings. Processing speed vary depending on the image being inspected.

\*2: Template: 128 x 128, Without rotation

\*3: Template: 128 x 128, Rotation: ±30°, Scale: ±5%


\*4: When using a color camera.

[Execution processing speed]		Unit: msec		
Filter functions	640 × 480	1,600 × 1,200	2,048 × 2,048	
5 x 5 Dilation	0.8	3.7	7.6	
5 x 5 Erosion	0.8	3.7	7.6	
5 x 5 Smoothing	1.2	5.8	13.1	
5 x 5 Edge extraction X	0.8	3.3	6.6	
5 x 5 Edge extraction Y	0.8	3.3	6.8	
5 x 5 Prewitt	1.9	9.9	21.5	
5 x 5 Sobel	1.9	10.5	21.7	
Image rotation	1.9	11.5	24.8	
Grey conversion*4	1.2	5.1	—	
Color extraction*4	0.5	2.4	—	

# Interface

## Operation screen Man-hour reduction


The PV200 series has been designed to simplify implementation in both pre-production and post-production.

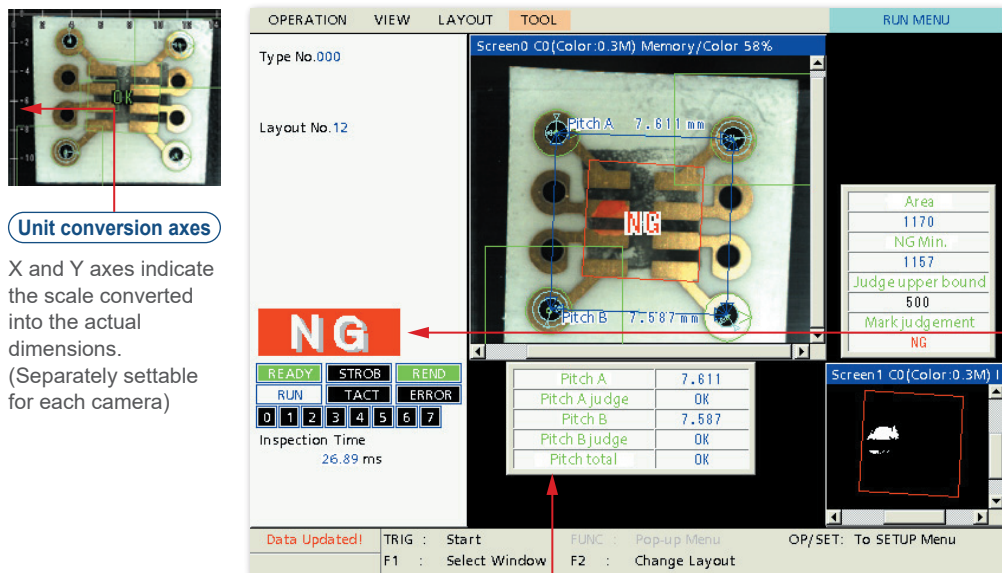

### Data R (Read) / W (Write) function

Program modifications can be quickly made in the RUN mode without replacing the program or switching to the setting screen. This is useful in cases where changes to the inspection area and pre-processing parameters must be made after the program has been finalized.

[Modification examples]

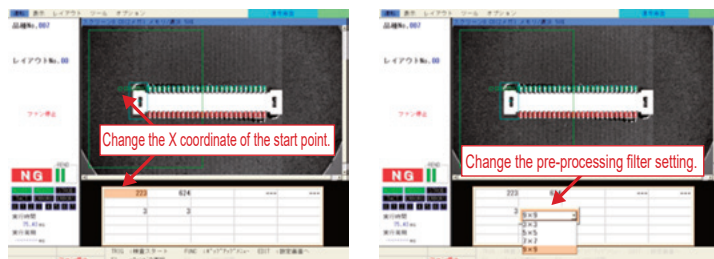

### Splash screen

The splash (startup) screen can be changed to an original screen, such as a screen suitable for the user's equipment or a screen including a brand logo. (A bitmap with a maximum size of 640 x 480 pixels)

### Operation customization by external signal

The PV200 series is equipped with a total of five points for ASSIGN and EXTRA signals, which allow you to customize the allocations of tasks, such as layout switching, image data output and screenshot printing.

### Customizable Display

#### Character / Figure drawing



A function for drawing text (multi-lingual), measured values, cross marks, arrow marks (dimension lines), rectangles, and ellipses. This function allows drawn items to be displayed following the calculation results or detected positions. It is also possible to specify the character size, fill regions and switch the drawn item colors or turn on/off the display of the items according to the pass/fail check results.

#### Marker function

A straight line, rectangle, circle, ellipse, and cross line can be displayed at any position. The display position can be specified by using external signal.

#### Layout

The VGA screen (640 x 480 pixels) can display two images and two pages of the Data R/W screen. Layouts can be customized and up to 16 patterns can be registered. They can be switched in accordance with the situation using either the keypad or external signals.

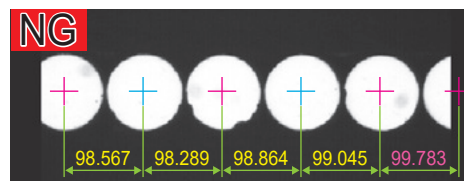





## Setup screen

### Select menu

By registering to the menu list any item you prefer from the items in the setup screen, you become able to perform operations directly, verify settings, and make changes.

- Improve operability by registering to the menu those functions you use a lot.
- Prevent operation mistakes by registering to the menu those functions that are okay to change.




**Checker parameter registration**  
Only the set value and result are displayed when a checker parameter is chosen.

\*Parameters other than those items chosen are not displayed.

Number of registrations:  
max. 50 pages/product type (16 items/page)

### Password protection

Setting a password prevents the careless switching to the setup screen. The password can have a maximum of 15 digits (from 84 alphanumeric and symbol characters). By joint use with the Select Menu, it is possible to distinguish between operator and administrator use.

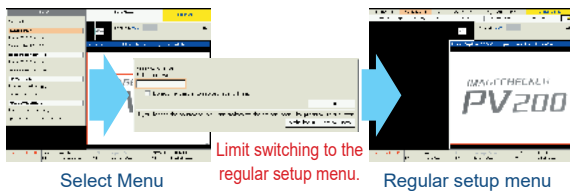


Select Menu

Limit switching to the regular setup menu.

Regular setup menu

### Collective moving of inspection areas

This function is essential to simultaneously move multiple inspection areas for the purpose of fine adjustment of the target position. The areas can be chosen by camera, position correction group, or inspection checker type.



## PVWIN200 setup software

### User-friendly drag-and-drop operations

Drag the target image and drop it onto a PVWIN200 screen to start the operation. The guidance by the navigation view icons will help you set the inspection conditions.




Simulation cycle



Download PVWIN for free from our website.


### Checker list

The checker list shows the on/off state of each inspection function and the inspection results so that users can check the program outline. It is possible to jump to the setting screen for a selected function and edit the settings.

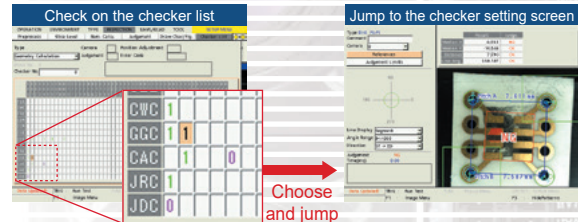

### Histogram

In the image preprocessing and the binarization setting screens, both the original image and its histogram are displayed as guidance for processing.

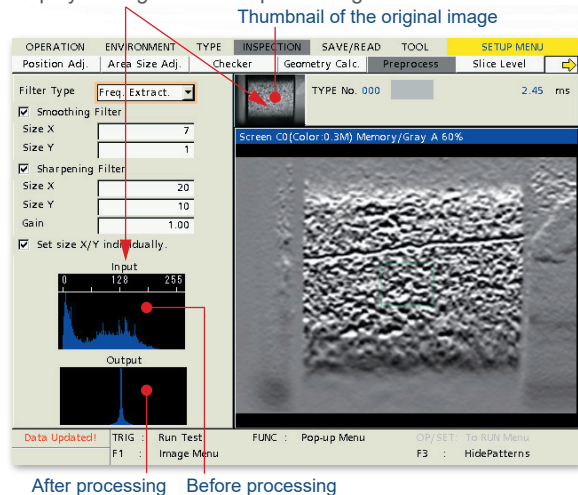

### Setting help


Various functions are built in that are useful when installing the PV200 series at the worksite.

Setting help function

- Focus adjustment
- Communication test
- Aperture adjustment
- Parallel I/O test
- Grey data analysis
- Image capture delay adjustment

### Simulation cycle for debugging

The continuous simulation and data logging functions facilitate setting data corrections and verifications. The export function allows you to manage the setting data change history.



Can be switched to the screen displaying "NG" items only

PV200 setup software  
IMAGECHECKER  
PVWIN200





## Solutions for Optical Character Recognition (OCR) and 1D / 2D Code Reading (CR)

### All-in-one model featuring image processing, optical character recognition (OCR) and code reading (CR) functions

- Compatible with a wide variety of cameras ranging from 0.3M to 4M pixels  
Reliable character extraction achieved by the color / gray combination function
- The optical character recognition (OCR) can read up to 80 characters. [Capable of case-sensitive (capital letter or small letters) reading]
- The 1D / 2D code reading function is compatible with the following code types and can read up to 80 characters.  
1D code: 25 types (Industrial 2 of 5, EAN-13, Code 39, etc. \*1)  
2D code: 2 types (Data Matrix ECC 200, QR Code)
- Capable of checking the 1D / 2D code reading result with that of reading the character string indicated with the code
- Equipped with a function to check the 2D code print quality (Compliant with ISO / IEC 15415)
- Capable of combination inspections using a variety of checker functions of **PV200** (Smart edge, etc.)
- The PLC communications function enables communications with PLC without programming (Ethernet and RS-232C).
- Compatible with setup software (**PVWIN230**), which enables off-line operation




## A wide variety of Preprocessing filters, Color extraction and Gray conversion functions provide reliable reading

Reliably extracting only characters of selected colors even if the contrast with the background is low (Characters of up to 8 colors can be extracted simultaneously.)



Capable of reliably reading deformed, distorted or partly chipped characters  
Arc-shaped character strings, italic and dotted characters can be read.

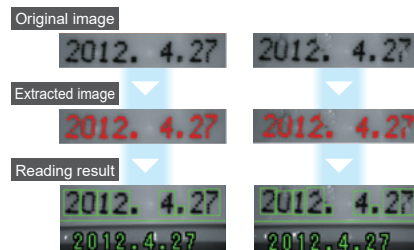

2D code reading: Codes with contrast fluctuations, out-of-focus codes, and codes with hidden or chipped portions can also be read.



\*1: Readable 1D codes (all the 25 types) : Industrial 2 of 5, Interleaved 2 of 5, Codabar, Code39, Code93, Code128, EAN-13, EAN-13 Add-On 2, EAN-13 Add-On 5, EAN-8, EAN-8 Add-On 2, EAN-8 Add-On 5, UPC-A, UPC-A Add-On 2, UPC-A Add-On 5, UPC-E, UPC-E Add-On 2, UPC-E Add-On 5, PharmaCode, RSS-14 (GS1 Databar), RSS-14 Truncated (GS1 Databar Truncated), RSS-14 Stacked (GS1 Databar Stacked), RSS-14 Stacked Omnidirectional (GS1 Databar Stacked Omnidirectional), RSS Limited (GS1 Databar Limited), RSS Expanded (GS1 Databar Expanded)


## Application examples of PV230

### Optical character recognition and positioning applications

#### Conventional problem

Work-piece slippage caused printing misalignment, which led to failure to pass the shipping inspection process.

#### Before





(No image processing)

#### Benefit by PV230

By performing position adjustment during the printing process, more products can pass which equates to greater yields. Furthermore, optical character recognition can also be performed in the same process.

#### After

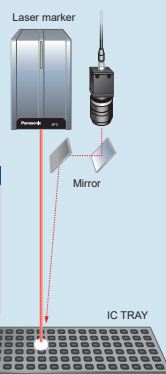

### Code reader, optical character recognition, stamp mark presence and external inspection applications

#### Conventional problem


It was necessary to control a machine vision system and a code reader in multiple steps by workers.




2D code

#### Benefit by PV230

The traceability can be done in one step, which makes automation possible. Furthermore, external inspection can also be performed in the same step.



After If you introduce the all-in-one model,  
OCR checker  
CR checker  
Color window checker  
Smart matching checker  
Reading result  
2012.3.9  
ABCDEF

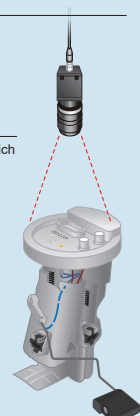

## Suggestion of Machine Vision System for Alignment

Suggestion 1 Auto calibration function

Suggestion 2 Calibration graphics

Suggestion 3 Alignment simulation function [setup software]

Suggestion 4 Sample setting data



Supported stages: UVW, XYθ, Xθ, XθY and YθX (also supports Line θ)

### Auto calibration function

The alignment mark is captured and the coordinates of the camera and stage are automatically calibrated.

#### [Setting procedure]

##### 1 Calibration setting

- Stage setting • Mark setting


##### 2 Using auto calibration function

- \* The coordinates of camera and stage are automatically calibrated.

Calibration complete

- The difference in two camera views and flexible camera attachment (rotation and tilt) also supported.


Settings are easy by using the sample setting data\*  
\* Can be downloaded from our website.



No troublesome settings and calculations!

### Calibration graphics

Auto calibration result can be verified visually. Easy to verify whether or not calibration was performed accurately, one of the factors for alignment problems.



Auto calibration result:  
Lateral placement same as actual positional relationship



Auto calibration result:  
Vertical placement different from actual positional relationship


### Alignment simulation function [setup software]

\* Setup software can be downloaded from our website.


Alignment operation can be replicated on a PC.

The operation can be verified in stages through simulation that splits the alignment operation into 4 steps.


#### Step 1 Adjustment of rotation direction




#### Step 2 Adjustment of X-axis direction



#### Step 3 Adjustment of Y-axis direction



#### Step 4 Alignment complete



- In the event of a problem, as long as you have an image, you can use the setup software to check the alignment operation at your desk. This is convenient for determining the location of the source of the problem.
- By being able to check the output values, you can tell whether the problem is caused by image processing or whether it originates in the device.


### Sample setting data

Sample setting data saved with basic alignment conditions is available. Default settings are easily created by changing conditions such as the marks used by the user.


\* Sample setting data can be downloaded from our website.

### Application examples of PV240

#### Applying LCD and film



#### Crimping LCD and film boards



#### IC tray positioning



## Robot setup made totally simple! Introducing true robot vision

**4** functions reduce robot setup time.




### 1 Auto calibration function

Man-hour reduction

Accuracy improvement

By simply registering 3 or 4 capture coordinates with the **PV260**, you can easily convert the camera's coordinate system to the robot's coordinate system.

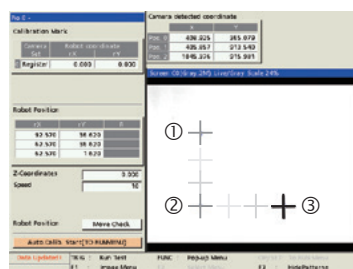

#### Advantage

- 1 Easier than doing it manually, work time is also reduced.
- 2 Even camera positional deviation can be quickly restored.
- 3 Variance in accuracy due to individual differences is eliminated.

### 2 Teaching support function

Man-hour reduction

Accuracy improvement

Improving on previous teaching operations that were carried out while manipulating a dedicated robot pendant, robot teaching can now be done on the **PV260** setup screen while viewing the captured image. Intuitive teaching can now be achieved using keypad operation.




- Teaching skill not required.
- Convenient in locations where teaching was difficult
- Increased safety
- Burden of repeated teaching reduced.


### 3 Robot tool offset function

Man-hour reduction

Accuracy improvement

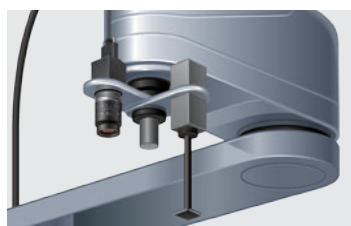


By simply registering two coordinates for the tool installed on the robot, the tool's coordinate system can be automatically calculated and converted to the robot's coordinate system.

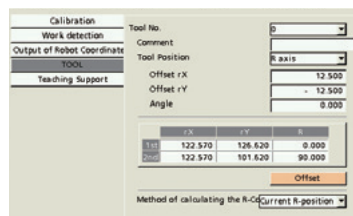

### 4 Direct communication function

Man-hour reduction



Direct communication is possible with different manufacturer's robot. PLC programming time can be reduced, because communication can be achieved by simply selecting the robot maker and type.

#### Robot can be operated from keypad.

Robot can be moved using keypad operation. Adjustment of capture position is easy with features such as auto calibration and teaching support.



#### PVWIN260 setup software

Robot vision inspection result can be replicated on a PC. The continuous simulation and data logging functions facilitate setting data creation, corrections and verifications.





# System Configuration

Equipped with a full selection of interfaces essential for image processing devices of the future




SD memory card  
(SDHC compatible)



Keypad

Serial (RS-232C)

Parallel I/O

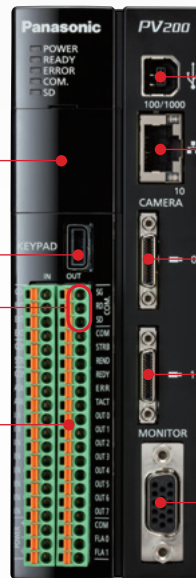

USB2.0

Gigabit Ethernet connector

Cameras (Digital cameras)

Up to two cameras of two different types can be connected.

0.3M color camera  
0.3M color compact camera  
2M color camera



0.3M grey camera  
0.3M grey compact camera  
2M grey camera  
4M grey camera



\*The 4M camera cannot be used in combination with another type of camera.

Analog RGB output



XGA monitor

## Product List

### Controller unit / Cameras / Keypads / Monitor / Camera attachment bracket

IMAGECHECKER  
Controller unit



Machine Vision System  
**PV200**  
ANPV0202ADP  
**PV200 MC**  
ANPV0202MC  
**PV230**  
ANPV0232ADP  
Machine Vision System  
for Alignment  
**PV240**  
ANPV0242ADP  
Robot Vision  
**PV260**  
ANPV0262ADP

Digital cameras for **PV200** series

0.3M color camera  
(Quad-speed)  
ANPVC2040



0.3M color compact camera  
(Triple-speed)  
ANPVC6030



2M color camera  
ANPVC2260



0.3M grey camera  
(Quad-speed)  
ANPVC1040



0.3M grey compact camera  
(Triple-speed)  
ANPVC5030



2M grey camera  
ANPVC1210



Keypads



3 m **9.8 ft** type:  
ANPVP03  
10 m **32.8 ft** type:  
ANPVP10

Camera cables  
for **PV200** series



3 m **9.8 ft** type:  
ANPVC8103  
5 m **16.4 ft** type:  
ANPVC8105 \*2  
10 m **32.8 ft** type:  
ANPVC8110 \*2

Cable for **PV200** series compact  
camera (for ANPVC5030 / ANPVC6030)



3 m **9.8 ft** type:  
ANPVC8203  
5 m **16.4 ft** type:  
ANPVC8205  
10 m **32.8 ft** type:  
ANPVC8210

Flexible  
camera cables



3 m **9.8 ft** type:  
ANPVC8103R  
5 m **16.4 ft** type:  
ANPVC8105R \*2  
10 m **32.8 ft** type:  
ANPVC8110R \*2

0.3M camera lenses



f = 6 with lock  
ANB842NL



f = 8.5 with lock  
ANB843L  
\*1



f = 16 with lock  
ANB845NL



f = 16 with lock  
ANM88161 \*1



f = 25 with lock  
ANB846NL

0.3M camera lenses



f = 25 with lock  
ANM88251  
\*1



f = 50 with lock  
ANB847L



f = 50 with lock  
ANM88501

2-megapixel camera lenses



f = 16 with lock  
ANPVL162



f = 25 with lock  
ANPVL252



f = 50 with lock  
ANPVL502

Adapter rings  
(for the 0.3M cameras and  
2-megapixel cameras)



5 mm **0.20 in** x 1 ring  
ANB84805  
40, 20, 10, 5, 1, 0.5 mm **1.57, 0.79, 0.39, 0.20, 0.04, 0.02 in** x 1 ring  
ANB848

XGA monitor



10.4 inches  
ANPVM11021

Monitor cables



3 m **9.8 ft** type:  
ANMX83313  
5 m **16.4 ft** type:  
ANMX83315

Camera attachment  
bracket  
(For 4M grey camera)  
ANPVH005

Digital power supply units for LED lighting

Orders to end on  
September 30, 2024

Digital power supply units for LED lighting



10 W  
ANB86001




30 W  
ANB86003

\*1: It can not be used in combination with the 0.3M compact camera.  
\*2: It can not be used in combination with the 4M grey camera.


## Controller unit / Monitor / Cameras / Keypads

### ● Controller unit ANPV0202ADP / ANPV0202MC / ANPV0232ADP / ANPV0242ADP / ANPV0262ADP

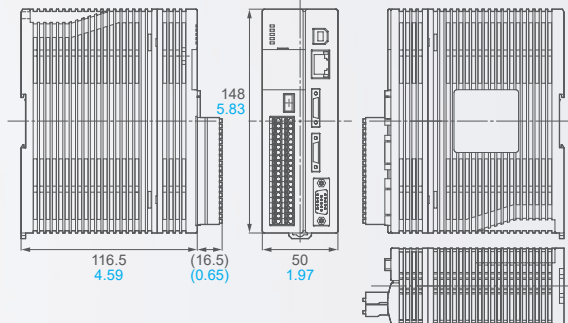


### ● 0.3M color and grey cameras ANPVC2040 / ANPVC1040


### ● 2M color and grey cameras ANPVC2260 / ANPVC1210

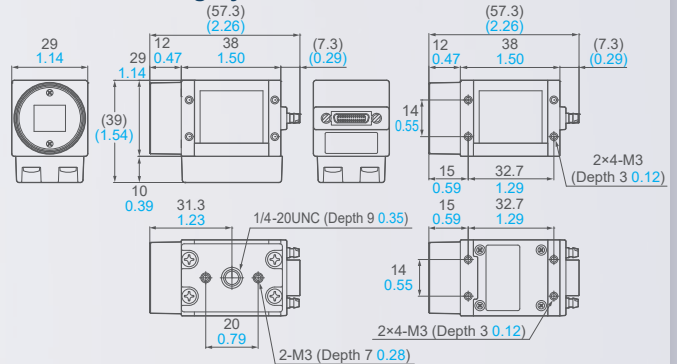


### ● XGA monitor ANPVM11021

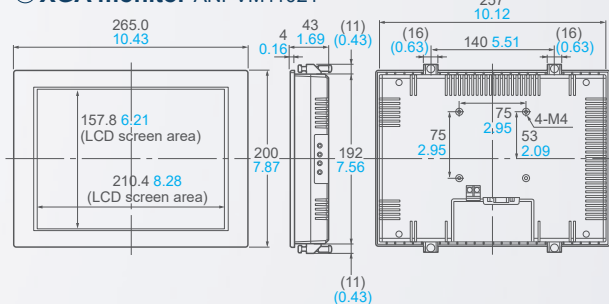


### ● 0.3M color and grey compact camera ANPVC6030 / ANPVC5030

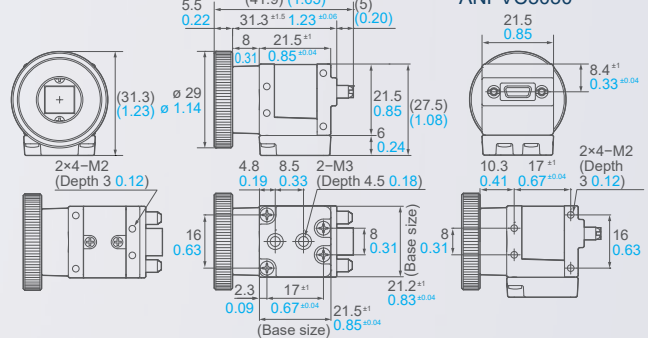

### ● Operation keypad ANPVP□

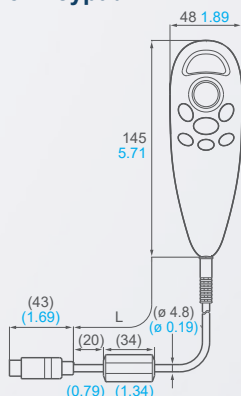

### ● 4M grey camera ANPVC1470

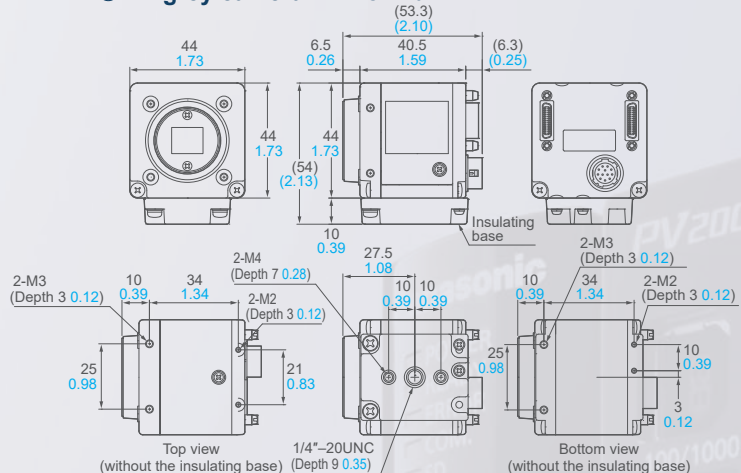

### ● Lenses for camera (Unit: mm in)


	0.3M camera lenses *2								2-megapixel camera lenses		
	f = 6	f = 8.5	f = 16	f = 25	f = 25	f = 25	f = 50	f = 50	f = 16	f = 25	f = 50
ANB842NL	ANB843L	ANB845NL	ANM88161	ANB846NL	ANM88251	ANB847NL	ANM88501	ANPVL162	ANPVL252	ANPVL502	
F-number	1.2	1.5	1.4	1.4	1.6	1.4	2.8	1.4	1.4	2.8	
Ø A	42 1.65	42 1.65	31 1.22	30.5 1.20	31 1.22	30.5 1.20	48 1.89	30.5 1.20	34 1.34	34 1.34	
L	46 1.81	40 1.58	33 1.30	31.21 1.23	37.3 1.47	31.5 1.24	48 1.89	38.5 1.52	35.9 to 38.0 1.41 to 1.50	47.1 to 52.2 1.85 to 2.06	63.0 to 77.4 2.48 to 3.05
B	— *1	— *1	— *1	21 0.83	— *1	21 0.83	— *1	21 0.83	22.5 0.89	22.5 0.89	22.5 0.89
C	— *1	— *1	— *1	19.8 0.78	— *1	20.05 0.79	— *1	20.6 0.81	22 0.87	22 0.87	22 0.87

### ● Camera attachment bracket (For 4M grey camera) ANPVH005

Please refer to our website.



## Digital power supply units for LED lighting
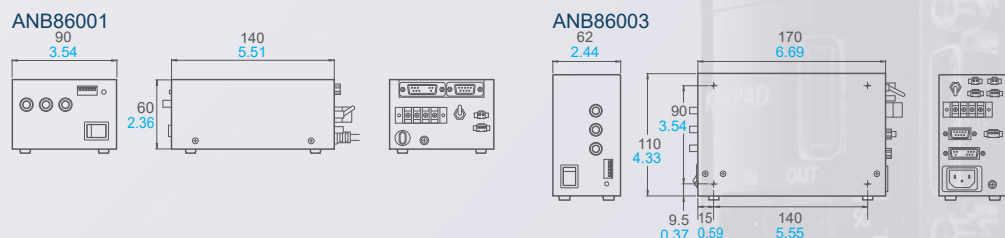
### ● Digital power supply units for LED lighting



\*1: The projection of the lock screw (M1.4 pan-head machine screw) is a maximum of 2 mm 0.08 in.  
\*2: ANB843L, ANM88161 and ANM88251 can not be used in combination with the 0.3M grey compact camera.




# Product Lineup

Function item		PV200								PV200 MC		
Controller unit		<div>Color and greyscale combination</div> 								<div>High speed processing</div> 		
		Image processing with top-level accuracy in its class is available with a surprisingly small number of man-hours required for programming.								0.3M compact limited edition special value camera with all the functions of the <b>PV200</b> .		
Maximum connectable number of cameras		2								2		
Camera	Pixel	0.3M compact	0.3M	2M	0.3M compact	0.3M	2M	4M	0.3M compact	0.3M compact		
	Grey/Color	Color				Grey				Color	Grey	
	Shutter speed	30 μs to 1,000 ms (Set in increments of 10 μs) 100 μs to 500 ms (Set in increments of 10 μs, 0.3M compact type only)								100 μs to 500 ms (Set in increments of 10 μs)		
Monitor output		Analog RGB								Analog RGB		
Processing methods		Color, Greyscale, Binary								Color, Greyscale, Binary		
Maximum registerable number of product types *1		256 types								256 types		
Maximum settable number of checkers *2		1,000 checkers/product type max.								1,000 checkers/product type max.		
Major inspection functions (Checkers)  ○: Applicable model	Position adjustment / Position rotation adjustment	○								○		
	Area size adjustment	○								○		
	Binary window / Binary edge	○								○		
	Feature extraction	○								○		
	Grey window / Grey edge	○								○		
	Smart matching	○								○		
	Contour matching	○								○		
	Flaw detection	○								○		
	Connector (binary window, grey window, grey edge)	○								○		
	Smart edge (circles) / (line)	○								○		
	Geometry calculation	○								○		
	Character / Figure drawing	○								○		
Dedicated function												
Numerical calculation / Judgment output		1,000 formula/product type max.								1,000 formulas/product type max.		
Data R/W		160 data								160 data		
Execution mode	Execution all	Execution of all checkers								Execution of all checkers		
	Branch execution	0 to 9 can be set.								0 to 9 can be set.		
	Designated execution	0 to 9 can be set.								0 to 9 can be set.		
Password protection		○ (Select menu)								○ (Select menu)		
Image preprocess / Image conversion		Preprocessing filters: 21 types, for each product type 16 groups/camera, 10 stages max.								Preprocessing filters: 21 types, for each product type 16 groups/camera, 10 stages max.		
Others												
Interface	RS-232C	1 port								1 port		
	Ethernet	○								○		
	SD / SDHC	○								○		
	USB	○								○		
	Parallel input / output	14 inputs, 15 outputs								14 inputs, 15 outputs		
Setup software		PVWIN200								PVWIN200		
Recommended monitor (cable)		ANPVM11021 (ANMX83313)								ANPVM11021 (ANMX83313)		

\*1: Due to limitations in memory capacity, it may not be possible to register more than 256 varieties.

\*2: Depend on the setting data size.



PV230							PV240							PV260						
<div>Code reader and Optical character recognition</div> <div></div> <div>All-in-one model featuring image processing, optical character recognition (OCR) and code reading (CR) functions</div>							<div>Alignment</div> <div></div> <div>Alignment functions are built in, such as the "Auto calibration function" and "Alignment simulation function".</div>							<div>Robot Vision</div> <div></div> <div>4 dedicated robot functions are built in. This not only increases productivity, but achieves a great reduction in the man-hours in robot prepping, maintenance, and product type changeovers.</div>						
2							2							2						
0.3M compact	0.3M	2M	0.3M compact	0.3M	2M	4M	0.3M compact	0.3M	2M	0.3M compact	0.3M	2M	4M	0.3M compact	0.3M	2M	0.3M compact	0.3M	2M	4M
Color			Grey				Color			Grey				Color			Grey			
30 μs to 1,000 ms (Set in increments of 10 μs) 100 μs to 500 ms (Set in increments of 10 μs, 0.3M compact type only)							30 μs to 1,000 ms (Set in increments of 10 μs) 100 μs to 500 ms (Set in increments of 10 μs, 0.3M compact type only)							30 μs to 1,000 ms (Set in increments of 10 μs) 100 μs to 500 ms (Set in increments of 10 μs, 0.3M compact type only)						
Analog RGB							Analog RGB							Analog RGB						
Color, Greyscale, Binary							Color, Greyscale, Binary							Color, Greyscale, Binary						
256 types							256 types							256 types						
1,000 checkers/product type max.							1,000 checkers/product type max.							1,000 checkers/product type max.						
○							○							○						
○							○							○						
○							○							○						
○							○							○						
○							○							○						
○							○							○						
○							○							○						
○							○							○						
○							○							○						
○							○							○						
○							○							○						
○							○							○						
○							○							○						
○							○							○						
Optical Character Recognition (OCR) and 1D / 2D Code Reading (CR)							Auto calibration, Calibration graphics and Alignment simulation							Auto calibration, Teaching support, Robot tool offset, Direct communication, Optical character recognition and 2D code						
1,000 formula/product type max.							1,000 formula/product type max.							1,000 formula/product type max.						
160 data							160 data							160 data						
Execution of all checkers							Execution of all checkers							Execution of all checkers						
0 to 9 can be set.							0 to 9 can be set.							0 to 9 can be set.						
0 to 9 can be set.							0 to 9 can be set.							0 to 9 can be set.						
○ (Select menu)							○ (Select menu)							○ (Select menu)						
Preprocessing filters: 21 types, for each product type 16 groups/camera, 10 stages max.							Preprocessing filters: 21 types, for each product type 16 groups/camera, 10 stages max.							Preprocessing filters: 21 types, for each product type 16 groups/camera, 10 stages max.						
1 port							1 port							1 port						
○							○							○						
○							○							○						
○							○							○						
14 inputs, 15 outputs							14 inputs, 15 outputs							14 inputs, 15 outputs						
PVWIN230							PVWIN240							PVWIN260						
ANPVM11021 (ANMX83313)							ANPVM11021 (ANMX83313)							ANPVM11021 (ANMX83313)						

# Part No. List

## Controller units

Product Name	Specification	Part No.
PV200	PhotoMOS relay output, 2-camera type	ANPV0202ADP
PV200 MC	PhotoMOS relay output, 2-camera type	ANPV0202MC
PV230	PhotoMOS relay output, 2-camera type	ANPV0232ADP
PV240	PhotoMOS relay output, 2-camera type	ANPV0242ADP
PV260	PhotoMOS relay output, 2-camera type	ANPV0262ADP

## Cameras and Camera cables ○: Applicable model

Product Name	Specification	Part No.	PV200	PV200 MC	PV230	PV240	PV260
0.3M Color camera	0.3M	ANPVC2040	○		○	○	○
0.3M Color compact camera	0.3M	ANPVC6030	○	○	○	○	○
2M Color camera	2M	ANPVC2260	○		○	○	○
0.3M Grey camera	0.3M	ANPVC1040	○		○	○	○
0.3M Grey compact camera	0.3M	ANPVC5030	○	○	○	○	○
2M Grey camera	2M	ANPVC1210	○		○	○	○
4M Grey camera	4M	ANPVC1470	○		○	○	○
Camera cable	3 m 9.8 ft	ANPVC8103	○		○	○	○
	5 m 16.4 ft *1	ANPVC8105	○		○	○	○
	10 m 32.8 ft *1	ANPVC8110	○		○	○	○
	Flexible 3 m 9.8 ft	ANPVC8103R	○		○	○	○
	Flexible 5 m 16.4 ft *1	ANPVC8105R	○		○	○	○
	Flexible 10 m 32.8 ft *1	ANPVC8110R	○		○	○	○
	For compact camera 3 m 9.8 ft	ANPVC8203	○	○	○	○	○
	For compact camera 5 m 16.4 ft	ANPVC8205	○	○	○	○	○
	For compact camera 10 m 32.8 ft	ANPVC8210	○	○	○	○	○

\*1: It can not be used in combination with the 4M grey camera (ANPVC1470).

## Keypads ○: Applicable model

Product Name	Specification	Part No.	PV200	PV200 MC	PV230	PV240	PV260
Keypad	3 m 9.8 ft, CE product	ANPVP03	○	○	○	○	○
	10 m 32.8 ft, CE product	ANPVP10	○	○	○	○	○

## Lens ○: Applicable model

Product Name	Specification	Part No.	PV200	PV200 MC	PV230	PV240	PV260
For 0.3M camera	f=6 C mount lens with lock	ANB842NL	○	○	○	○	○
	f=8.5 C mount lens with lock	ANB843L	○ *1		○ *1	○ *1	○ *1
	f=16 C mount compact lens with lock	ANB845NL	○	○	○	○	○
	f=25 C mount compact lens with lock	ANB846NL	○	○	○	○	○
	f=50 C mount lens with lock	ANB847L	○	○	○	○	○
	f=16 C mount ultra compact lens with lock	ANM88161	○ *1		○ *1	○ *1	○ *1
	f=25 C mount ultra compact lens with lock	ANM88251	○ *1		○ *1	○ *1	○ *1
	f=50 C mount compact lens with lock	ANM88501	○	○	○	○	○
For 2-megapixel camera	f=16 C mount lens with lock	ANPVL162	○		○	○	○
	f=25 C mount lens with lock	ANPVL252	○		○	○	○
	f=50 C mount lens with lock	ANPVL502	○		○	○	○

\*1: It can not be used in combination with the 0.3M compact camera.

## Adapter rings ○: Applicable model

Product Name	Specification	Part No.	PV200	PV200 MC	PV230	PV240	PV260
C mount adapter ring	Ring set for c mount lens (40/20/10/5/1/0.5 mm 1.58/0.79/0.39/0.20/0.04/0.02 in, each 1 pc.)	ANB848	○	○	○	○	○
	5 mm 0.20 in adapter ring, 1pc.	ANB84805	○	○	○	○	○

## Monitors and Monitor cables ○: Applicable model

Product Name	Specification	Part No.	PV200	PV200 MC	PV230	PV240	PV260
XGA monitor	24 V DC, 10.4 inches	ANPVM11021	○	○	○	○	○
Cable for XGA monitor	3 m 9.8 ft	ANMX83313	○	○	○	○	○
	5 m 16.4 ft	ANMX83315	○	○	○	○	○

## Others ○: Applicable model

Product Name	Specification	Part No.	PV200	PV200 MC	PV230	PV240	PV260
Attachment bracket	4 attachment bracket for 4M grey camera	ANPVH005	○		○	○	○
RS-232C communication cable	For PLC (discrete-wire cable) connection, 2 m 6.6 ft	AIP81842					
	For PC (D-SUB : 9 pin) connection, 3 m 9.8 ft	AFB85853					



# Specifications

## General specifications

Item	Specifications
Rated operating voltage	24 V DC
Operating voltage range	21.6 to 26.4 V DC (including ripples)
Rated current consumption	1.2 A max.
Ambient temperature during use	0 to +45 °C <b>32 to +113 °F</b> (However, no condensation or no freezing)
Storage ambient temperature	-20 to +60 °C <b>-4 to +140 °F</b> (However, no condensation or no freezing)
Ambient humidity during use	35 to 85 % RH (at 25 °C <b>77 °F</b> , However, no condensation or no freezing)
Storage ambient humidity	35 to 85 % RH (at 25 °C <b>77 °F</b> , However, no condensation or no freezing)
Noise immunity	1,000 V, Pulse width: 50 ns, 1 μs (using the noise simulator method)
Vibration resistance	10 to 55 Hz, 1 sweep/min, double amplitude of 0.75 mm <b>0.03 in.</b> , 30 minutes each in the X, Y, and Z directions
Shock resistance	196 m/s <sup>2</sup> , 5 times each in the X, Y and Z directions
Insulation resistance	100 MΩ or higher (measured by a 500 V DC megger) *1
(initial value)	Input and output terminals – Power and ground terminals Power terminal – Non-energized metal part
Breakdown voltage	500 V AC for 1 min (600 V AC for 1 sec), Cutoff current: 10 mA *1
(initial value)	Input and output terminals – Power and ground terminals Input and output terminals – Non-energized metal part Power terminal – Non-energized metal part
Battery life	10 years approx. (at 25 °C <b>77 °F</b> )
Weight	0.5 kg approx. (including terminal blocks)
Pollution degree	2

\*1: The evaluation was carried out with the primary side power supply varistor and capacitor removed from the internal circuit of the unit.

## Functional specifications

Item	Specifications		
CPU	32-bit, RISC CPU & DSP		
Input/output	Cameras	Up to two cameras selected from among 0.3M grey/grey compact/color cameras (640 x 480), 0.3M color compact camera (640 x 478) and 2M grey/color cameras (1,600 x 1,200) can be connected. Up to two 4M grey cameras can be connected. *2	
	Monitor output	Analog RGB (640 x 480) output	
	Memory card	SD/SDHC memory card	
	PLC communication compatible models (RS-232C)	Panasonic Industrial Devices SUNX	FP series
		OMRON	C, CV, and CS1 series
		Mitsubishi Electric	A, Q, FX, and FX2N series
		Fuji Electric	MICREX-SX SPH series
		Allen-Bradley	SLC500 series
		Modbus RTU compatible (performance confirmed with Siemens S7-1200)	
	PLC communication compatible models (Ethernet)	Panasonic Industrial Devices SUNX	FP series, <b>ET-LAN</b> unit
Mitsubishi Electric		Q series	
Yokogawa Electric		FA-M3 series	
PLC communication command	Specifiable external command instruction using PLC communication Command input format: polling / parallel input		
Parallel	14 inputs / 15 outputs		
Keypad input	Connector for dedicated keypad (ANPVP**), 1 channel		
USB	USB 2.0, A-B type (Only <b>PVWIN200</b> )		
Menu display	Four languages (five fonts), Switchable (Japanese, English, Korean, Traditional Chinese and Simplified Chinese)		
Monitor display	Split-screen display of up to two camera images, Zoom function (2 to 400%)		
	Image display: Through/Memory/NG object images		
	Display effects: Greyscale/Slice level group/Preprocessing group/Color/Extraction and binary/Grey conversion image, Display area (640 x 480)		
Processing methods	Greyscale processing/Thresholding processin/Color extraction/Grey conversion		
Processing resolution	2M camera (grey/color): 1,600 horizontal x 1,200 vertical pixels		
	0.3M camera (grey/grey compact/color): 640 horizontal x 480 vertical pixels		
	0.3M camera (color compact): 640 horizontal x 478 vertical pixels		
	4M camera (grey): 2,048 horizontal x 2,048 vertical pixels		
Trigger input	Select from: All cameras or detection trigger		
Number of connected cameras	Up to two cameras		
Camera connection	Connection by Power Over Camera Link (PoCL)		
Capture method	Frame shooting only. Capable of partial capture of one point		
	In partial capture mode, the minimum capture area to be set for the 0.3M/4M camera is one line, and that for the 2M camera is 100 lines.		
	(The area can be set in increments of one line for the grey camera, and two lines for the color camera.)		
Shutter speed	30 μs to 1,000 ms (Set in increments of 10 μs)		
	However, 0.3M grey compact camera is 100μs to 500 ms (Set in increments of 10μs)		
Gain setting range	1.0 to 5.0		
Number of product types	256 types max.(Due to limitations in memory capacity, it may not be possible to register more than 256 types.)		
Password	Switching from the current operating screen to the setup screen can be password controlled (within 15 characters)		
	Administration classification: invalid/valid (limit setting screen transition and limit regular menu switching)		
Inspection functions (Checkers)	1,000 checkers/product type max., including those for geometry calculation and character/figure drawing (depends on setting data)		
	Position adjustment, Position rotation adjustment, Rotation adjustment area size adjustment, Line, Binary window, Grey window, Binary edge, Grey edge, Feature extraction, Smart matching, Contour matching, Flaw detection, Connector (binary window), Connector (grey window), Connector (grey edge), Smart edge (circles), Smart edge (line), Color window		
	* Number of range masks: 16 ranges/checker		
	* Maximum registrable number of smart matching and contour matching templates: 2,000 pcs.		
Geometry calculation	1,000 checkers/product type max., including those for inspection functions and character/figure drawing (depends on setting data)		
	Eight calculation functions (distance between two points, intersection of two lines, median lines of two lines, perpendicular distance, approximate straight line, approximate circle, and approximate ellipse)		
Character/Figure drawing	Up to 10,000 characters/graphics (1,000 checkers x 10)/product type can be displayed on the images (depends on setting data).		
Inspection operation mode	Sequential processing: After completing the result output, the next image capture for inspection can be started		
	Parallel processing: After the capture and the synchronized output of results of the previous inspection are completed, the image capture process for the next inspection is ready to start, and then the capture and inspection results output are processed concurrently		
Slice level group	16 group/camera, 256-grey scale (0 to 255)		

## Functional specifications

Item	Specification				
Image preprocess	Preprocessing selections: Grey conversion / Color extraction / Grey preprocessing				
	Grey conversion	Available only when a color camera is connected. For each product type, 16 groups/camera Each R/G/B value setting for grey conversion can be changed within the range of -1,000 to 1,000.			
	Color extraction	Available only when a color camera is connected. Color extraction mode: Selectable between high speed and expansion Number of extractable colors: High speed: A total of 16 colors when one camera is connected and eight colors when two cameras are connected. Expansion: A total of 128 colors when one camera is connected and 64 colors when two cameras are connected. Only eight registered colors can be selected from one checker.			
		For each product type, 16 groups/camera, 10 stages max. Preprocessing filters: 21 types			
	Grey preprocessing	(Dilation, Erosion, Erosion → Dilation, Dilation → Erosion, Auto correction, Grey cut, Area averaging, Correction settings, Median, Smoothing, Sobel, Prewitt, Laplacian, Edge extraction X, Edge extraction Y, Sharpen, Tophat, Dynamic, Grey difference, Rotation, and Reflect)			
	1,000 formulas/product type max., including those for judgement output (depends on setting data)				
	Calculations involving output values of inspection functions				
Numerical calculation	Operators	Four fundamental operations (+, -, x, /), Bracket operations, Trigonometric functions (14 types), Comparison functions (6 types), Math functions (15 types), Geometry functions (18 types), Coordinate conversion functions (8 types)			
	Statistic data operation items	Scan count/OK count/NG count/Average/Variance/Max./Min./Range/OK average/OK variance/OK judgment max./OK judgment min./OK range/NG average/NG variance/NG judgment max./NG judgment min./NG range User limit: 1,000 items /product type max.			
	Other operation items	Previous data of numerical calculation and judgment results, general-purpose registers			
	Number of reference operators	16 items/formula max.			
Judgement output	1,000 formula/product type max., including those for numerical calculation (depends on setting data)				
	Substitution for and logical calculation of judgement results from checkers and numerical calculations				
	Operators	NOT/AND/OR/XOR/Brackets			
	Number of reference items	16 items/formula max.			
	Others	Total judgment conditions, save image conditions, Image output conditions, parallel output setting (8 outputs from OUT0 to OUT7 and 16 outputs from OUT0 to OUT15, or all setting output)			
	Collective movement of set checkers in units of position/rotation adjustment groups				
Collective moving	Specify the "Move" or "Not move" option for each checker type. However, position and rotation adjustment checkers cannot be moved.				
Marker	8 markers/product type max. for each camera, Graphic display on the operation screen, Selectable from six colors				
	Shapes	Rectangle/Circle, Ellipse/Polygon/Line/Cross			
Data R/W	Two-window display of up to 80 (5x16) cells/product type on screen in table form in RUN mode				
	Substitution of title input, checker conditions/results, numerical calculation results, numerical calculation judgment results, judgment results, statistical results possible. Change of upper/lower limits of numerical computation in the table in RUN mode possible.				
Select menu	Maximum registrable number of arbitrary setup items in setup screen on menu: 16 items x 50 pages/type.				
	Registration information	Button / Text / Page move / Separator			
	Button allocation method	FUNC key for item / Selection from list			
	Others	Page name registration possible			
Calibration	Coordinates, coordinate origin, horizontal and vertical coefficients can be set for each camera to obtain actual dimensions for each product type.				
	Processing method	Unit conversion / 1 point coordinate conversion / 2 point coordinate conversion / 3 points coordinate conversion			
	Operation method	Static / Dynamic			
	Standard registration	Arbitrary position / Smart matching / Contour matching / Intersection / Centre of circle / Feature extraction			
Conversion data	Coordinates, coordinate origin, horizontal and vertical coefficients can be set for each camera to obtain actual dimensions.				
	Others	Comment input			
Template re-registration settings	Position	Set position/Adjusted position			
	Display	Yes/No			
Execution mode	All execution	Execution of all checkers			
	Branch execution	Destination blocks (0 to 9) can be set.			
	Designated execution	Blocks to be executed (0 to 9) can be set.			
External input/output functions *3	○: Applicable, ✕: Inapplicable				
	Parallel	Serial	Ethernet	SD memory card	
	Inspection start instruction	○	○	○	—
	Re-inspection start instruction	○	○	○	—
	Product type change instruction	○	○	○	—
	Template re-registration instruction	○	○	○	—
	Display layout switch instruction	○	○	○	—
	Operation/stop switch instruction	○	○	○	—
	Statistics reset instruction	○	○	○	—
	Error reset instruction	○	○	○	—
	Instruction to save setting data in the built-in memory	○	○	○	—
	Instruction to save setting data in the SD memory card	○	○	○	—
	Instruction to read setting data from the built-in memory	○	○	○	—
	Instruction to read setting data from the SD memory card	○	○	○	—
	Instruction to cancel the saving/reading of setting data	○	○	○	—
	Instruction to save the image memory in the SD memory card	○	○	○	—
	Instruction to erase the image memory	○	○	○	—
	Instruction to print the screenshot	○	○	○	—
	Inspection/processing cancellation instruction	○	○	○	—
	Instruction to save the latest inspection image	○	✕	✕	—
	Instruction to read/change the set value	✕	○	○	—
	Instruction to prohibit the keypad screen operation	✕	○	○	—
	Keypad emulation instruction	✕	○	○	—
PLC communication command read instruction	○	✕	✕	—	
Output	Scanning operation count	○	○	○	○
	Total judgement output	○	○	○	○
	Judgement calculation (JD) result output	○	○	○	○
	Numerical calculation result output	○	○	○	○
	Image output	✕	✕	○*4	○
	Screenshot output	✕	✕	○*4	○

Specifications for **PV200** firmware Ver. 1.5 or later.

\*2: The 4M grey camera cannot be used in combination with another type of camera.

The ANPVC82□ dedicated compact camera cable is required to connect the compact cameras.

\*3: USB cannot be used for the external input/output functions.

\*4: Image and screenshot output functions via Ethernet are received by dedicated software, **Image Receiver**.


# Specifications

## Camera specifications

Item	Specifications						
Type/Part No.	4M grey / ANPVC1470	2M grey / ANPVC1210	0.3M grey / ANPVC1040	0.3M color compact / ANPVC6030	0.3M grey compact / ANPVC5030	2M color/ANPVC2260	0.3M color/ANPVC2040
Capture element	2/3-inch CCD fixed image element	1/1.8-inch CCD fixed image element	1/3-inch CCD fixed image element	1/3-inch CMOS fixed image element	1/3-inch CMOS fixed image element	1/1.8-inch CCD fixed image element	1/3-inch CCD fixed image element
Pixels	2,048 horizontal x 2,048 vertical pixels	1,600 horizontal x 1,200 vertical pixels	640 horizontal x 480 vertical pixels	640 horizontal x 478 vertical pixels	640 horizontal x 480 vertical pixels	1,600 horizontal x 1,200 vertical pixels	640 horizontal x 480 vertical pixels
	Pixel size: 3.45 µm x 3.45 µm (Square pixels)	Pixel size: 4.4 µm x 4.4 µm (Square pixels)	Pixel size: 7.4 µm x 7.4 µm (Square pixels)	Pixel size: 6.0 µm x 6.0 µm (Square pixels)	Pixel size: 6.0 µm x 6.0 µm (Square pixels)	Pixel size: 4.4 µm x 4.4 µm (Square pixels)	Pixel size: 7.4 µm x 7.4 µm (Square pixels)
Frame rate	16 frames/sec max.	30 frames/sec max.	120 frames/sec max.	90 frames/sec max.	90 frames/sec max.	30 frames/sec max.	120 frames/sec max.
Lens mount	C mount			NF mount *2		C mount	
Ambient temperature during use *1	0 to +40 °C +32 to +104 °F	0 to +40 °C +32 to +104 °F	0 to +45 °C +32 to +113 °F	0 to +40 °C +32 to +104 °F	0 to +40 °C +32 to +104 °F	0 to +40 °C +32 to +104 °F	0 to +45 °C +32 to +113 °F
Ambient humidity during use *1	35 to 85% RH (at 25 °C 77 °F)						
Vibration resistance	10 to 55 Hz, 1 sweep/min, double amplitude of 1 mm 0.04 in, 30 minutes each in the X, Y, and Z directions			10 to 200 Hz, 1 sweep/10 min, 30 minutes each in the 3 directions		10 to 55 Hz, 1 sweep/min, double amplitude of 1 mm 0.04 in, 30 minutes each in the X, Y, and Z directions	
Shock resistance	490.3 m/s <sup>2</sup> , 1 time each in the X, Y and Z directions		700 m/s <sup>2</sup> , 3 times each in the X, Y and Z directions	700 m/s <sup>2</sup> , 1 time each in the X, Y and Z directions		700 m/s <sup>2</sup> , 3 times each in the X, Y and Z directions	
Weight (Excluding the lens)	125 g approx.	65 g approx.	65 g approx.	30 g approx.	30 g approx.	65 g approx.	65 g approx.

\*1: However, no condensation or no freezing \*2: Comes with C mount adapter.

## Visual Fields

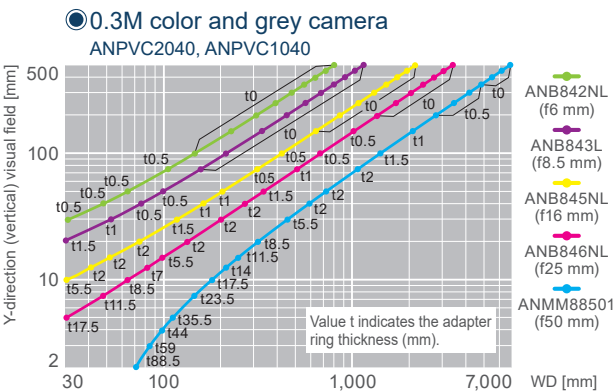

## Disclaimer

The applications described in the catalog are all intended for examples only. The purchase of our products described in the catalog shall not be regarded as granting of a license to use our products in the described applications. We do NOT warrant that we have obtained some intellectual properties, such as patent rights, with respect to such applications, or that the described applications may not infringe any intellectual property rights, such as patent rights, of a third party.

**Panasonic**  
INDUSTRY

**Panasonic Industry Co., Ltd.**

Industrial Device Business Division

7-1-1, Morofuku, Daito-shi, Osaka 574-0044, Japan

[industrial.panasonic.com/ac/e/](http://industrial.panasonic.com/ac/e/)