SYSTEM LAYOUT

Control units

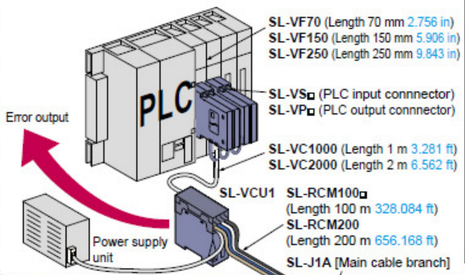













Output units

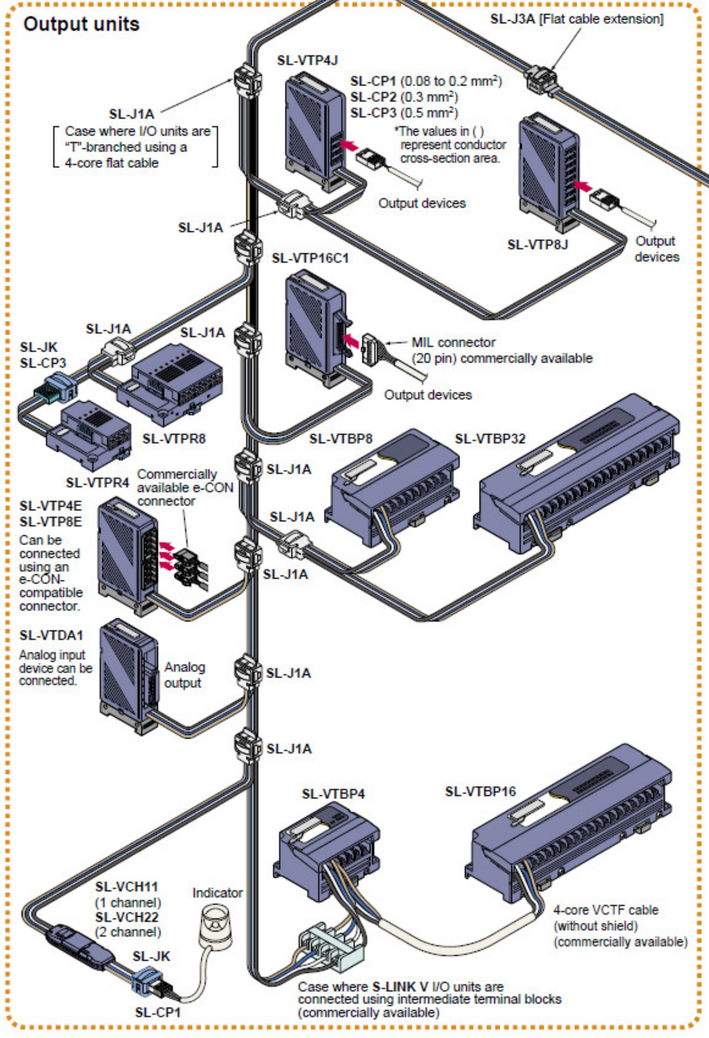

I/O mixed units

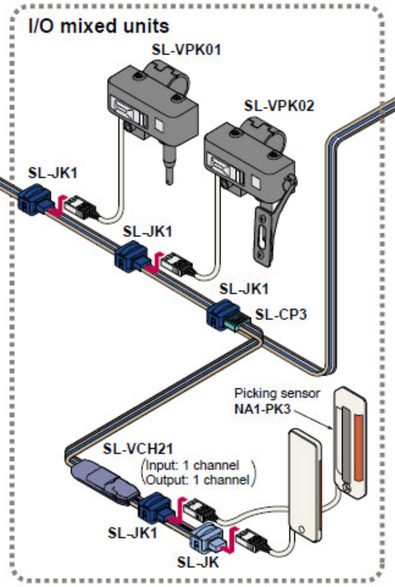

Connection device extension

4 pin type *The values in ( ) represent conductor cross-section area.



SL-CP1 (0.08 to 0.2 mm²)
SL-CP2 (0.3 mm²)
SL-CP (0.5 mm²)

SL-CJ1 (0.08 to 0.2 mm²)
SL-CJ2 (0.3 mm²)
SL-JK (0.5 mm²)

2 pin type



SL-CP12 (0.08 to 0.2 mm²)
SL-CP22 (0.3 mm²)

SL-CJ12 (0.08 to 0.2 mm²)
SL-CJ22 (0.3 mm²)

Input units

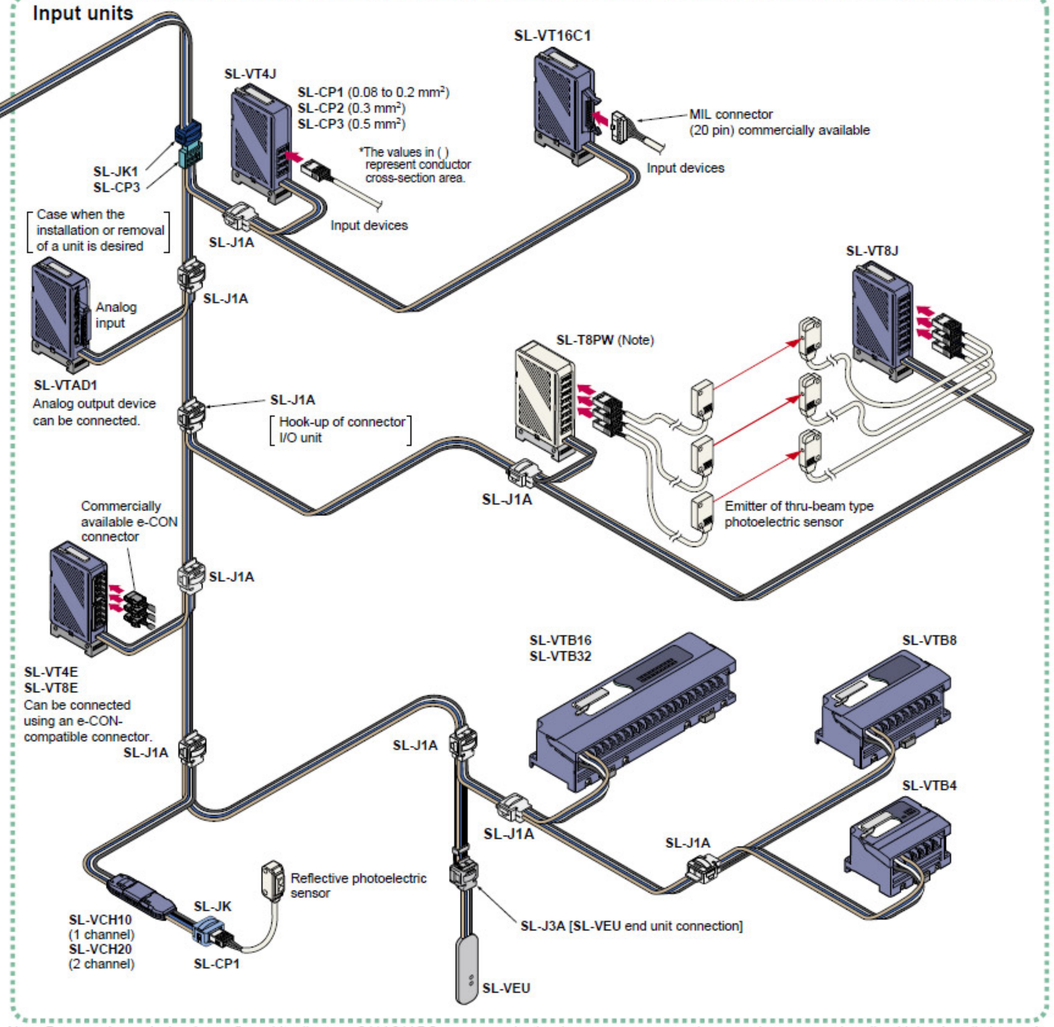

Note: Because the exclusive 4-core flat cable allows a +24 V-0 V DC power supply, thru-beam type sensor emitters can be connected easily with low installation work.

PCB mounting

Control module
SL-VMC1

I/O module

Input
SL-VM8 (8-point)
SL-VM16 (16-point)

Output
SL-VMP8 (8-point)
SL-VMP16 (16-point)

Debugging tool

Handy monitor
SL-VHM1

Partner makers products

Koganei Corporation.	SMC Pneumatics	CKD Corporation.
Manifold electromagnetic valves	Manifold electromagnetic valves	Manifold electromagnetic valves